




STANDARD PLUS



 21 003 497
 21 004 497

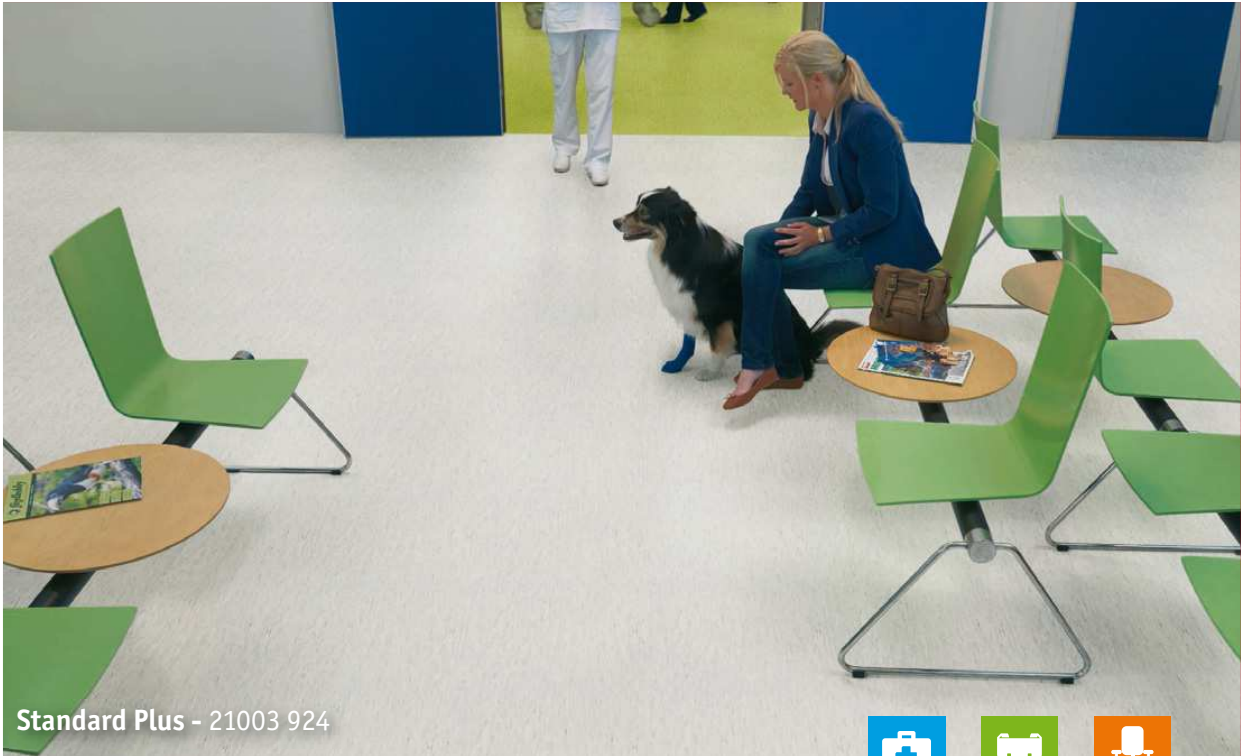


 21 003 924
 21 006 924
 21 005 924




 21 003 498
 21 004 498
 21 006 498
 21 005 498







 21 003 499



 21 003 910



 21 003 911
 21 004 911
 21 006 911
 21 005 911




 21 003 482
 21 004 482





 21 003 912
 21 004 912





 21 003 913
 21 006 913
 21 005 913



 21 003 914




 21 003 915

TECHNICAL DATA	STANDARDS	Standard Plus 2.0mm	Standard Plus 1.5mm
Classification			
Classification	ISO 10581 (EN 649) commercial industrial	Classes: 34 43	Classes: 32 41
Characteristics			
Total thickness	ISO 24346 (EN 428)	2.00mm	1.5mm
Wear layer thickness	ISO 24340 (EN 429)	2.00mm	1.5mm
Total weight	ISO 23997 (EN 430)	3 300g/m ²	2 475g/m ²
Surface treatment	-	PUR	PUR
Abrasion group	EN 660-2	Group P: ≤ 4.00mm ³	Group P: ≤ 4.00mm ³
Technical performances			
Residual indentation	Average measured value	0.04mm	
	ISO 24343-1 (EN 433) requirement	≤ 0.10mm	
Reaction to fire	EN 13501-1 EN ISO 9239-1 EN ISO 11925-2	B ₁ s1 ≥ 8 kW/m ² Pass	B ₁ s1 ≥ 8 kW/m ² Pass
Dimensional stability	ISO 23999 (EN 434)	Rolls: ≤ 0.40% Tiles: ≤ 0.25%	Rolls: ≤ 0.40%
Castor wheel test	ISO 4918 (EN 425)	Suitable	
Marine equipment	IMO FTPC Part 5 and 2 IMO Res. A653	 0575	—
Static electrical charge	EN 1815	< 2kV	< 2kV
Light fastness	EN ISO 105-B02	≥ 6	≥ 6
Chemical resistance	ISO 846: Part C	Good resistance	Good resistance
Fungi and bacteria resistance	ISO 26987 (EN 423)	Does not favour growth	Does not favour growth
Clean room test	ASTM F51/00	Class A	Class A
Slip resistance	DIN 51130 EN 13893	R9 ≥ 0.3	R9 ≥ 0.3
Thermal resistance Underfloor heating	EN 12667 / DIN 52612	0.01m ² K/W Suitable - max. 27°C	Suitable - max. 27°C

The above information is subject to modifications for the benefit of further improvement (05/2014).

For more detailed technical information, please contact Tarkett.



 21 003 496

STANDARD PLUS

Main Product Features

- Tiles and sheets in different thicknesses
- Classical design in refreshed colours
- Tough and durable
- PUR surface treatment for low maintenance

Surface Treatment



Sustainability Tag



Logistics Information



Available in rolls

Rolls length: 231m (2.0mm)




Rolls length: 251m (1.5mm)

Laying direction:



Available in tiles

Laying direction:



General Information






Play with the Room Designer

STANDARD PLUS



Standard Plus - 21003 483




 21 003 921
 21 006 921
 21 005 921







 21 003 922
 21 004 922



 21 003 923







 21 003 494
 21 004 494
 21 006 494
 21 005 494




 21 003 919
 21 004 919





 21 003 492
 21 004 492
 21 006 492
 21 005 492






 21 003 920




 21 003 479
 21 004 479
 21 006 479
 21 005 479




 21 003 483
 21 006 483
 21 005 483



 21 003 484




 21 003 485




 21 003 916
 21 004 916





 21 003 917



 21 003 488



 21 003 918

TECHNICAL DATA	STANDARDS	Standard Plus 2.0mm	Standard Plus 1.5mm
Classification			
Classification	ISO 10581 (EN 649) commercial industrial	Classes: 34 43	Classes: 32 41
Characteristics			
Total thickness	ISO 24346 (EN 428)	2.00mm	1.5mm
Wear layer thickness	ISO 24340 (EN 429)	2.00mm	1.5mm
Total weight	ISO 23997 (EN 430)	3 300g/m ²	2 475g/m ²
Surface treatment	-	PUR	PUR
Abrasion group	EN 660-2	Group P: ≤ 4.00mm ³	Group P: ≤ 4.00mm ³
Technical performances			
Residual indentation	Average measured value	0.04mm	
	ISO 24343-1 (EN 433) requirement	≤ 0.10mm	
Reaction to fire	EN 13501-1 EN ISO 9239-1 EN ISO 11925-2	B ₁ s1 ≥ 8 kW/m ² Pass	B ₁ s1 ≥ 8 kW/m ² Pass
Dimensional stability	ISO 23999 (EN 434)	Rolls: ≤ 0.40% Tiles: ≤ 0.25%	Rolls: ≤ 0.40%
Castor wheel test	ISO 4918 (EN 425)	Suitable	
Marine equipment	IMO FTPC Part 5 and 2 IMO Res. A653		—
Static electrical charge	EN 1815	< 2kV	< 2kV
Light fastness	EN ISO 105-B02	≥ 6	≥ 6
Chemical resistance	ISO 846: Part C	Good resistance	Good resistance
Fungi and bacteria resistance	ISO 26987 (EN 423)	Does not favour growth	Does not favour growth
Clean room test	ASTM F51/00	Class A	Class A
Slip resistance	DIN 51130 EN 13893	R9 ≥ 0.3	R9 ≥ 0.3
Thermal resistance Underfloor heating	EN 12667 / DIN 52612	0.01m ² K/W Suitable - max. 27°C	Suitable - max. 27°C




The above information is subject to modifications for the benefit of further improvement (05/2014).

For more detailed technical information, please contact Tarkett.




 21 003 495
 21 004 495



 21 003 493
 21 006 493
 21 005 493



 21 003 500

STANDARD PLUS

Main Product Features

- Tiles and sheets in different thicknesses
- Classical design in refreshed colours
- Tough and durable
- PUR surface treatment for low maintenance

Surface Treatment



Sustainability Tag



Logistics Information



Available in rolls
Rolls length: 231m (2.0mm)



Rolls length: 251m (1.5mm)

Laying direction:



Available in tiles

Laying direction:



General Information



Play with the Room Designer